

SPECTRA




◆ PRODUCT INTRODUCTION




◆ PRODUCT PARAMETERS

Source: 48x 8W RGBWA LEDs
LED PWM Frequency: 600 – 25000Hz
Colour Temperature: 2500K – 10000K
CRI Ra: 90
Beam Angle: 60x10 degrees lens (85x25 degrees field angle)
Strobe: 0-20Hz
Dimmer: 0-100%
Control Protocols: DMX512A, RDM ANSI E1.20, wireless DMX (LumenRadio CRMX) and mobile application
Tilt Movement: 0-360 degrees (manual adjustment)
Cooling: convection
Working Temperature: -40°C - 45°C
Max. Power Consumption: 360W
Dimensions: 378 x 140 x 213 mm
Weight: 7 Kg
IP Grade: IP65
Rigging: 1x omega clamps and/or holes for clamp screw fixation

◆ DIMENSIONS

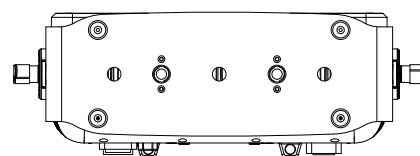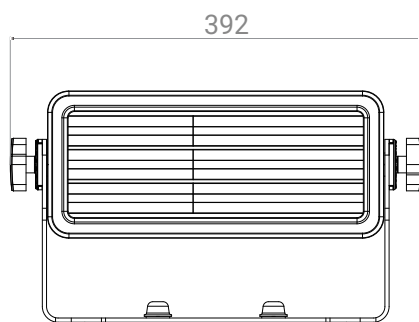

◆ ACCESSORIES



barndoor



one sided barndoor



magnetic frost filter
(15°, 20°, 40°, 60X10° optional)



safety rope



suspension clamp